

FIG. 3

Figure 3 of the instant invention

Attachment 1

【図11】

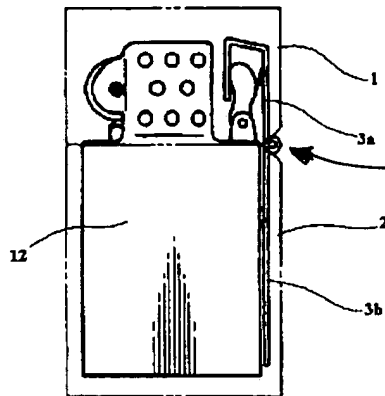


Figure 11 of JP2001-165437

The hinge is positioned at the exterior of the lighter case between the bottom edge of the upper case and the upper edge of the lower case.

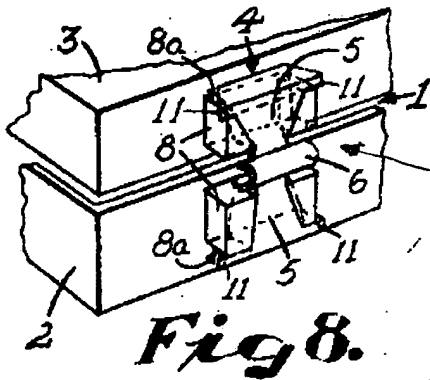


Figure 8 of Newton (US 3,615,035)

The hinge is also is positioned at the exterior of the container.

Figure 1 of the instant invention.

The connector is fittingly inserted into the edge port and is received within the edge port of the case, wherein the connecting means is hidden within the case side edge of the case at a position below the upper edge of the case so as to pivotally connect the upper cover with the case.

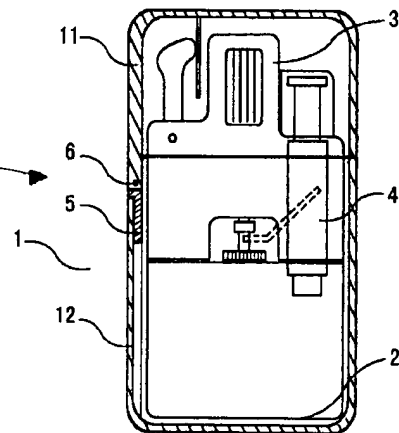


FIG. 1